


E-Z UP® INSTANT SHELTERS®

HOW TO SET UP YOUR E-Z UP® SIDEWALL ACCESSORY

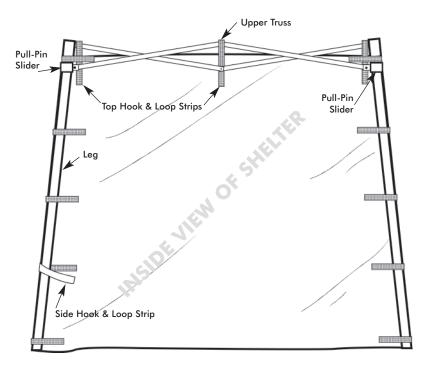

E-Z UP® SIDEWALL SET UP:

Your E-Z UP® Sidewalls are designed to be used with the legs of your Instant Shelter® frame set to the highest height position.

- Attach the sidewall to the frame as shown by wrapping the top hook & loop strips around the upper trusses and above the pull-pin sliders.
- 2. Then attach the side hook and loop strips around the legs.
- 3. Press all the hook and loop strips together firmly.
- 4. Repeat steps above for remaining sidewall/s.

Note: The top of sidewall tucks underneath fabric top.

IMPORTANT INFORMATION

- 1. To insure proper sidewall fit, slightly position legs inward and then attach sidewalls. Note: Walls should be attached BEFORE frame is staked down.
- 2. Always stake or weight down your E-Z UP® shelter. Do not use in any potentially windy or rainy weather. Wind and rain can damage the E-Z UP® shelter and may also result in injury to you or others. Therefore, do not rely on shelter for protection in heavy or prolonged rain storms.
- 3. The E-Z UP® shelter is designed as a temporary sun shelter. Do not leave up for extended periods.
- 4. Use caution when handling the E-Z UP® frame. Avoid pinching hands or fingers as frame opens or closes.
- 5. Do not use shelter in a lightning storm.
- 6. Do not leave your E-Z UP® Instant Shelter® product unattended.
- 7. Do not build fires under shelter.

INTERNATIONAL E-Z UP, INC.

1601 Iowa Avenue, Riverside, California 92507 (909) 426-0060 • Fax (909) 426-0063

www.ezup.com

Customer Service Hot Line

1 (800) SHADE ME

ASK ABOUT OUR OTHER
E-Z UP® INSTANT PRODUCTS™
For online warranty service, parts and
accessories as E-Z as 1-2-click,
contact us at www.ezupdirect.com